



1. When the cabin is newly built there should be a gap above the window of up to 2". This is good. The cabin settle as much as 2" in the first 18 months. The walls will settle and the gap will reduce over time.



2. The window and door fascias are fitted all round the windows/doors inside and outside. Fix fascia boards to window frame only, not wall logs. The wall logs must be free to move.





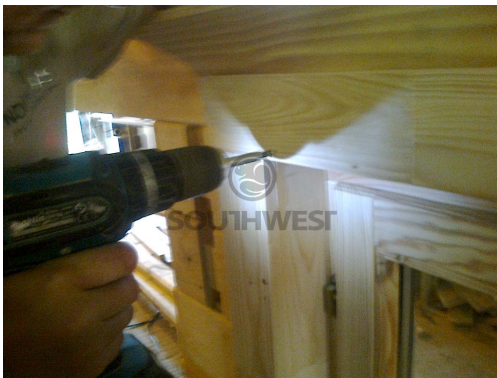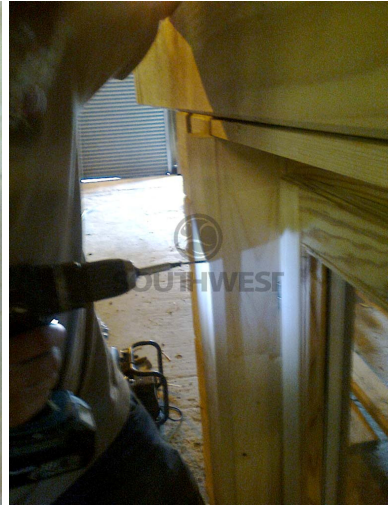

3. Screws can be place in the bottom wall log if required as this wall log will not settle any further.

